


# NOTICE

Thank you for support of AV Costar Products. If you should have any questions or comments please contact us at your convenience.



Full Installation  
Documentation

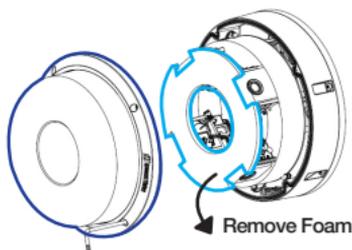

## Packaging Removal

Unit is shipped with **packaging foam** cushions inside the lower dome. **Remove the lower dome** and remove the cushions prior to installation. **Reinstall the lower dome** to prevent installation damage.

## Power Requirements



This product is intended to be supplied by a Listed Power Adapter or DC power source, rated

- (1) 42.5-57VDC (Max. 25.5W) for PoE.
- (2) 24VAC, 50/60Hz (Max. 26W)
- (3) 24VDC – 48VDC (Max. 26W)

T<sub>ma</sub> = 50°C, and the altitude of operation = 2000m.

## Camera Orientation

If the 180°, 270°, or 360° preset configurations are being used, orient the camera such that **the arrow** denoting the front of the camera is pointing towards the center of the desired field of view.

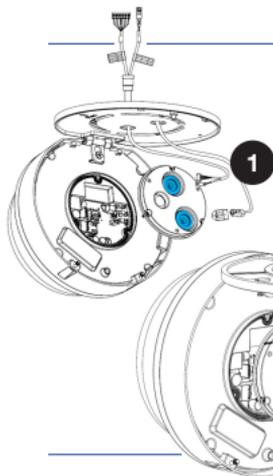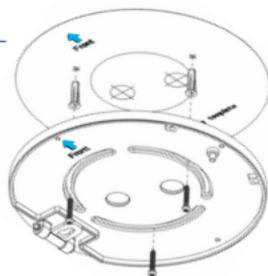

## Cable Grommet Usage

Proper use of **cable grommets** is required to maintain IP ratings. Ensure the grommet properly seats flush with the camera housing to create a water-tight seal.

